



July 7, 2020

~~May 19, 2020~~

East Fern Ave Fence & Gate


- 1 Contractor to provide all labor, materials, equipment and supervision required for this project as describe within this scope and quantity list and as shown on Dwg-SK-01
- 2 Contractor is responsible for providing a safe worksite and provide any safety items necessary for this work.
- 3 Contractor is responsible for underground locate request. Any utility conflict shall be brought to City's attention immediately.
- 4 Contractor is responsible for layout work.
- 5 Workmanship is to meet industry standard for this type of work.
- 6 The material estimates are approximations. The gate cost is for 1 gate in place. If it is determined another gate is required, the cost listed will be paid amount for additional gate.
- 7 The limits of work are the tie in to the existing fence near intersection of N Juniper St and E Fern Ave. and the concrete wing wall of the creek crossing on E. Fern Ave.
- 8 This is a lump sum job and the contractor is responsible for measuring and estimating quantities for fence installation similar to the existing 5 strand barbed wire fence along N. Juniper St. at tie in point.



RANDY KURTTs

Construction Project Manager

200 North Alston St. Foley, AL 36536
rkurtt@cityoffoley.org • cityoffoley.org
(251) 971-1511 • Fax: (251) 970-2398
Cell: (251) 424-8275

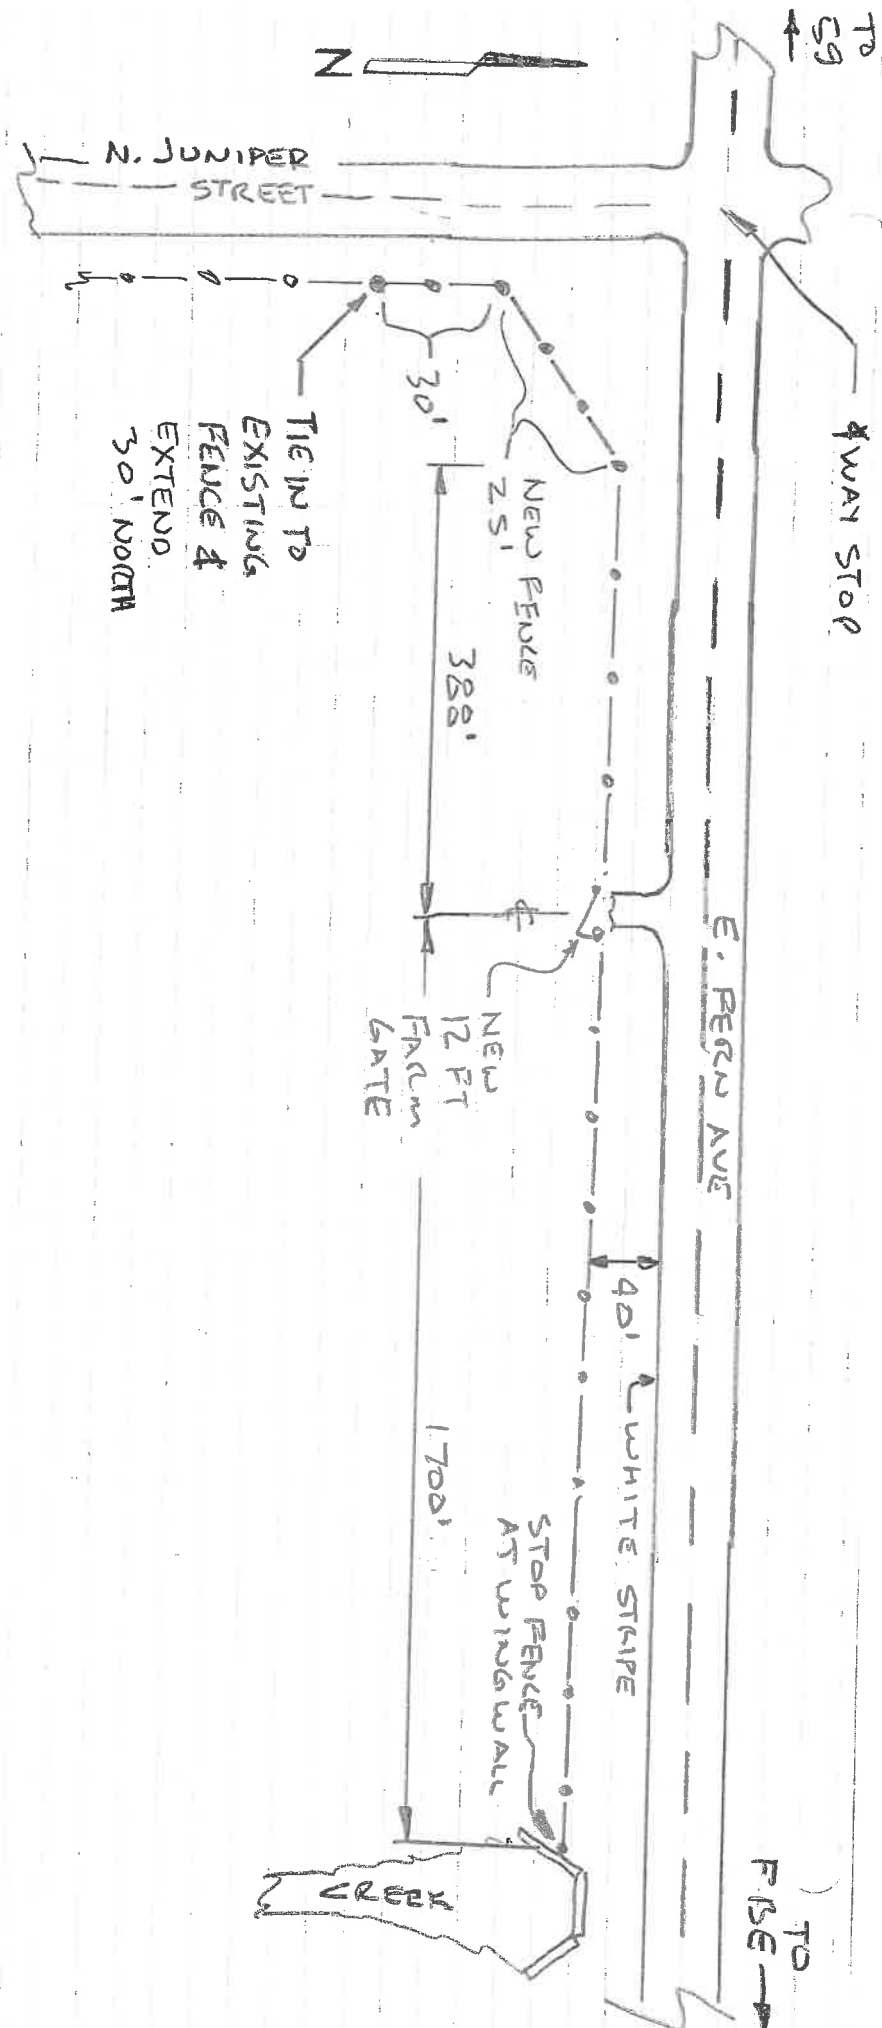

CITY OF POLEY
E. FERN AVE FENCE

MAY 18 2020

DWG SK-1

East Fern Ave Fence & Gate


Plan Quantity per unit cost

Base Bid

5/19/2020

item	description	estimated quantity	units	unit cost	total cost
1	Mobilize/De-mobilize including clean up and debris removal and Traffic Control	1	LS		
2	Gate, 7 Bar Heavy Duty Std Bull Gate. 50" high with verticle Z braces, 1 3/4" rounded, high-tensile strength tubing, 7 Rails, with Powder over E-Coat. Manuf: Tarter, Country of Origin: USA, 12 ft length with mounting hardware, Part No: RGB12T, Weight: 64 Lbs.	1	EA		
3	Barbed wire, 5 strand, OK brand 12.5 ga. 2 Pt. <i>OR APPROVED EQUAL USE</i>	Aprox 10,750 ft req'd	LS		
4	Steel fence post, Studded T post 6 1/2 ft steel enemal paint 1.25 lbs/ft	Aprox 170 req'd	LS		
5	Wood fence Post, treated 5" dia (min) x 8 ft long	Aprox 65 req'd	LS		
6					
7					
8					
9					
10					
				TOTAL	

(2)
WOOD
DIAGONAL
BRACES

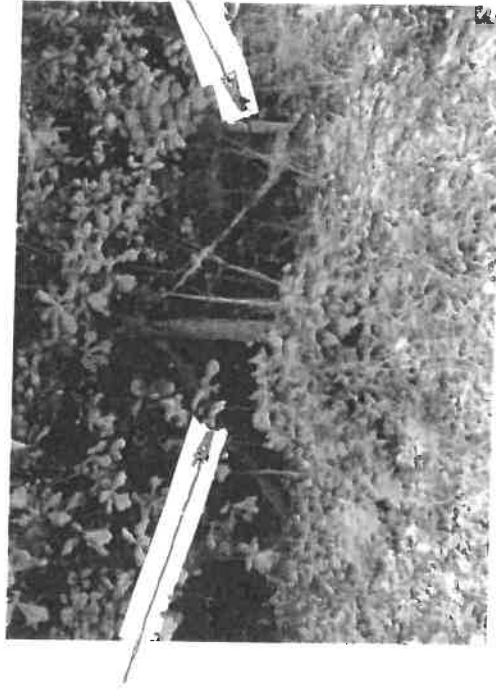

(3)
WOOD
POST

WOOD POST

BRACE ASS'Y

SPACED AT

250' ± AS

REQ'D FOR

WIRE SPLICE/TENSION