




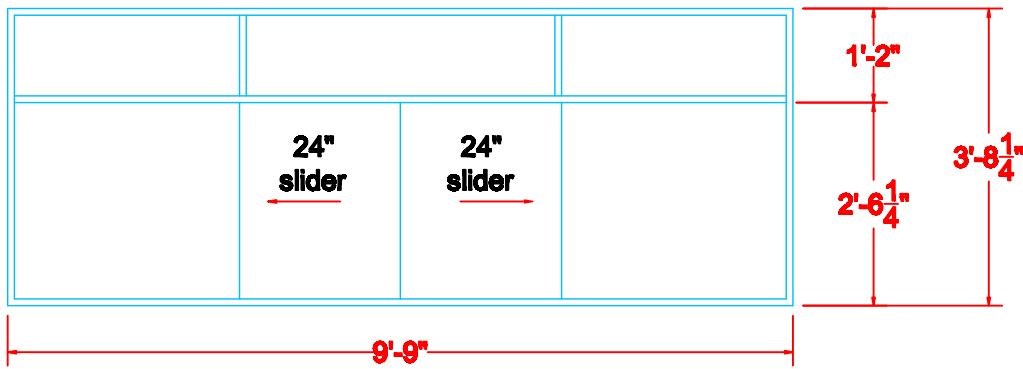

LARGE WINDOW
ONE SERVER STATION
N T S

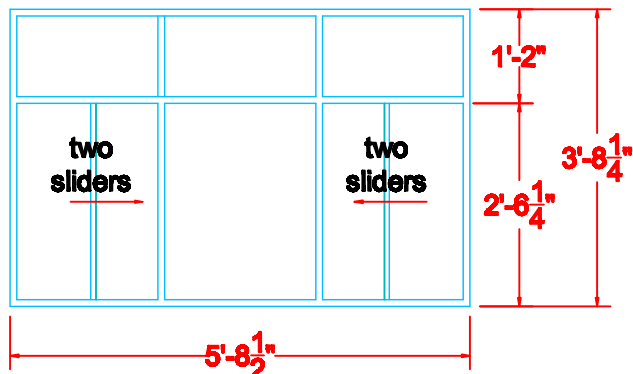

MID WINDOW
TWO SERVER STATIONS
N T S

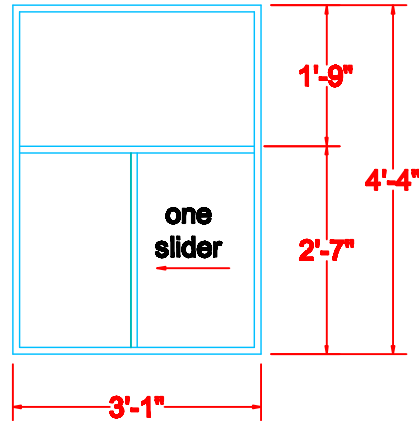

SMALL WINDOW
ONE SERVER STATIONS
N T S

NOTE: DIMENSIONS ARE APPROXIMATE. FIELD VERIFY

SCOPE OF WORK

WINDOWS

1. PROVIDE AND INSTALL THREE STOREFRONT WINDOW SYSTEMS WITH DRIVE THRU TYPE SLIDING WINDOWS.
2. MAKE REPAIRS TO OVERHEAD DOORS (ALUMINUM SLAT TYPE) WINDOW STOPS OR GUIDES ARE TO BE ADJUSTED AND DOORS SERVICED FOR SMOOTH OPERATION.
3. ALL SLIDING WINDOWS TO HAVE LOCKING LATCHES.
4. MATERIAL TO BE A WHITE FINISH.
5. WINDOWS TO MEET CURRENT BUILDING CODE.

CABINET WORK

1. REMOVE CABINETS BELOW SERVER WINDOWS AND CUT DOWN WIDTH FROM 30\" TO 24\" AND REINSTALL WITH REPAIRS MADE TO CABINET BACK AND BACKSPLASH.
2. CONTRACTOR RESPONSIBLE FOR ANY TOUCH UP PAINTING.

FRYER VENT HOOD

1. CONTRACTOR TO PROVIDE AND INSTALL 4 FT WIDE VENT HOOD. INSTALLATION IS TO INCLUDE EXHAUST THRU ROOF AND ALL FLASHING AS REQUIRED. PROVIDE SPECIFICATIONS WITH PROPOSAL.
CONTRACTOR TO PROVIDE SHEET METAL GREASE SPLASH SHEILD AT LARGE WINDOW FRAME.
2. ELECTRICAL TO INCLUDE TIE-IN TO JB. ANY OTHER ELECTRICAL WORK WILL BE PERFORMED BY OTHERS.