

FY 26 Resurfacing Projects



Lakeview Drive - Resurfacing along Lakeview Drive beginning at Carnoustie Drive, continuing west around the lake to County Road 12 as part of the base project. Total project includes 3.00 lane miles.



Eagle Lane & Caddie Circle - Resurfacing along Eagle Lane & Caddie Circle beginning at Lakeview Drive, continuing south to County Road 12 as part of the Base project. Total project includes 0.5 lane miles.





W Peachtree - Resurfacing along W Peachtree Ave beginning at N Cedar St., continuing east to Hwy 59 as part of the base project. Total project includes 1.00 lane miles.



Alley Way - Resurfacing the Alley Way between W Orange Ave and W Myrtle Ave beginning at S Pine St., continuing east to S Alston St. as Alternate No. 2. Total project includes 0.26 lane miles.




S. Alston Small Median- Construct small median to ensure safety at intersection

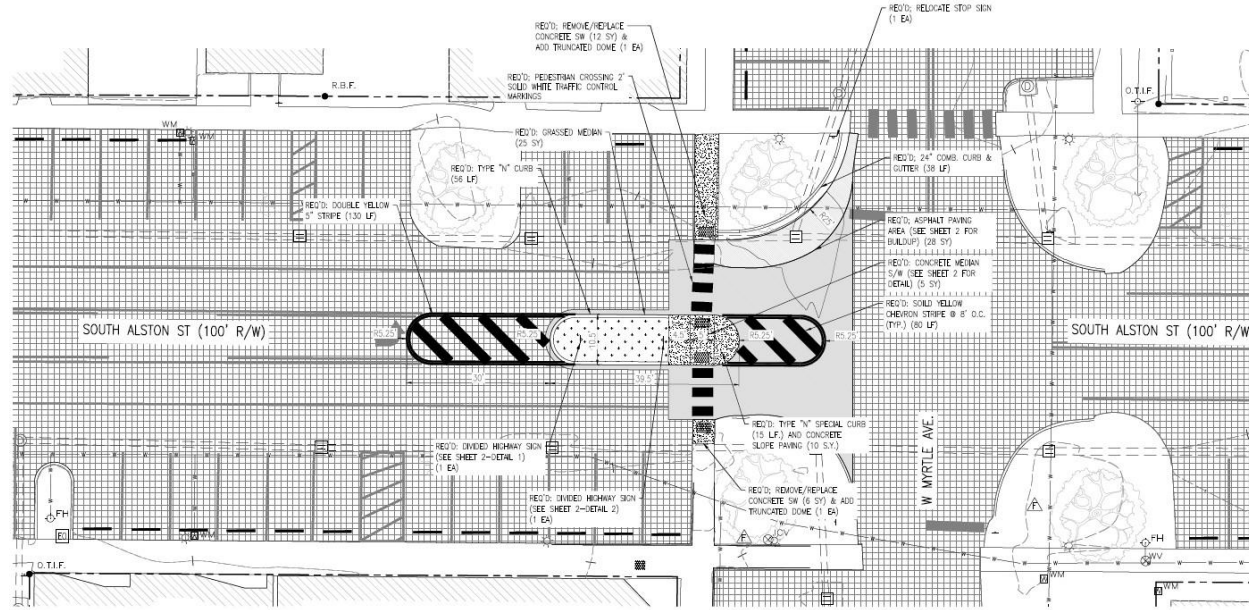


TYPICAL SECTION
ASPHALT PARKING AREA
N.T.S.

1. 1.5" ALDOT SECTION 428A, BITUMINOUS WEARING SURFACE (185 LB/SY)
2. ALDOT SECTION 428S TACK COAT
3. 2" ALDOT SECTION 428B, BITUMINOUS BINDER (220 LB/SY)
4. 6" ALDOT SECTION 825, CRUSHED AGGREGATE BASE COURSE (COMPACTED TO 100% MAX. DENSITY)
5. EXISTING SUBGRADE

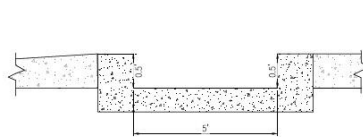


CONCRETE MEDIAN SW

N.T.S.

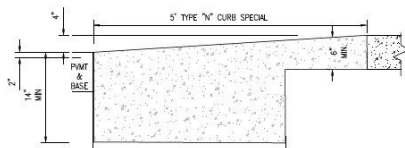

TYPE "N" SPECIAL CURB

N.T.S.

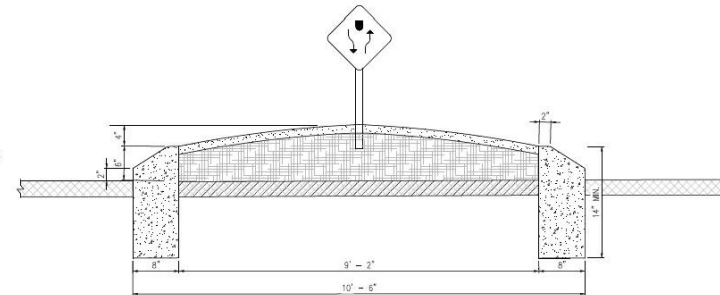

GRASSED MEDIAN DETAIL

N.T.S.

Additive Bid Alternate -Park Ave - Resurfacing along Park Ave beginning at S Hickory St, continuing east to S Pine St. as Alternate No. 1. Total project includes 1.54 lane miles.

