


MACROAIR FANS PROPOSAL

Prepared for :

FOLEY FIRE DEPT

Prepared by :

MIKE LOISEL, VECTOR SALES

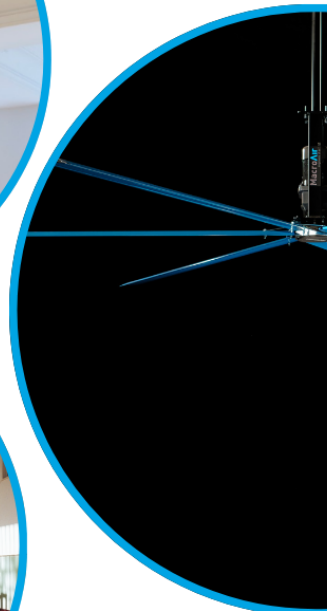

Quote Date: 05/29/2025
Expiration: 07/28/2025

Quote #~~2580~~

M25-0289

PREPARED FOR

Foley Fire Dept

Bryan Shutt
9920 Fairway Dr
Foley, AK, 36535
251-747-2121
bshutt@cityoffoley.org

PREPARED BY

Vector Sales
Mike Loisel
8836 S Choctaw
Baton Rouge, LA 70815

Air can be a powerful business partner and we thank you for considering MacroAir, inventors of HVLS Fan Technology. It's about more than manufacturing HVLS fans - MacroAir is committed to providing efficient air movement solutions, innovative designs, quality materials and exceptional customer service. Please contact us at 225-927-7830 to place an order or for help with questions.

Item Summary

Item Name	Quantity	Price
AVD5		\$6,140.00
8'-14' MacroAir AVD5, 25mm, Series Fan	1	
14' / 4.27 M XL 5 BLADE SET	1	
AVD5/AVD6 UMH KIT NOT MOUNTED	1	
AVD3 5' UMH DROP EXT	1	
AVD5 CP 2HP/240V/1PH UMH	1	
DIGITAL REMOTE ASSEMBLY	1	
CABLE, CAT5E SHIELDED, 100'	1	
Items Subtotal		\$6,140.00
Estimated Freight		\$613.20
Installation		\$3,050.00
Grand Total Cost		\$9,803.20

SIGNATURE

DATE

Service Agreement


Turn Key Installation-includes mounting of fan-through ceiling and mount to joists-
Electrical from panel to fan- Control wire into control room Includes lift Fire system
wiring, devices and tie in by others

Experience the power and efficiency of MacroAir's AVD5, a cutting-edge direct-drive fan for industrial and commercial spaces. The captivating five-blade AVD5 is a perfect composition of purposeful design, superior performance, and cost efficiency. Elevate your projects with the AVD5, a commanding revelation in air movement.



STANDARD FEATURES:

- 1.0 HP (equivalent) Direct Drive motor, rated for indoor/outdoor use*
- Clearcoat anodized airfoil blades
- Industry leading onboard electronics for unmatched reliability
- Forward, reverse, variable speed
- Integrated VFD/Mount Enclosure
- Safety Components: safety cable, Universal Mount with guy wires, blade retainer links

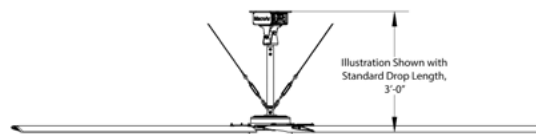

STEP 1: POWER UNIT

Item #	Options	Qty
M500-0025-MA	8-14 ft Power Unit, 1.0 HP Equivalent	
M500-0035-MA	16-18 ft Power Unit, 1.0 HP Equivalent	
M500-0050-MA	20-24 ft Power Unit, 1.0 HP Equivalent	

STEP 2: BLADES

Item #	Diameter	Qty
60-80008-00	8 ft / 2.44 m	
60-80010-00	10 ft / 3.05 m	
60-80012-00	12 ft / 3.66 m	
60-80014-00	14 ft / 4.27 m	
60-80016-00	16 ft / 4.88 m	
60-80018-00	18 ft / 5.49 m	
60-80020-00	20 ft / 6.07 m	
60-80024-00	24 ft / 7.32 m	

STEP 3: VOLTAGE/PHASE

Item #	Options	Qty
33-22017-00	208-240V Single Phase, 50/60 Hz AVD5 DROP ENCL (for use with Universal Mount)	
33-22038-00	208-240V Three Phase, 50/60 Hz AVD5 DROP ENCL (for use with Universal Mount)	
33-42038-00	480V Three Phase, 50/60 Hz AVD5 DROP ENCL (for use with Universal Mount)	
35-22017-00	208-240V Single Phase, 50/60 Hz AVD5 SCHNEIDER CONT PNL (for use with Rapid Mount Industrial)	
35-22038-00	208-240V Three Phase, 50/60 Hz AVD5 SCHNEIDER CONT PNL (for use with Rapid Mount Industrial)	
35-42038-00	480V Three Phase, 50/60 Hz AVD5 SCHNEIDER CONT PNL (for use with Rapid Mount Industrial)	

STEP 4: MOUNTING

Item #	Options	Qty
60-50150-00	AVD Universal Mount with I-beam Hardware Kit	
60-40049-00	Glulam Hardware Kit	
60-50136-00	Rapid Mount Industrial with I-Beam Hardware Kit (requires drive in control panel, offboard)	

STEP 5: CONTROLS

Item #	Description	Qty
30-90308-00	Digital Remote Assembly (Standard)	
30-04006-00	Controller 4	
30-04007-00	Controller 4 + Single Temperature Sensor	
30-04030-01	Controller 30	
30-10012-00	AirLynk - BacNet	
30-10011-00	AirLynk - LonWorks	
30-04030-02	Dual Control Enabled Controller 30 (requires AirLynk-BacNet)	

*Motor unit only

STEP 6: STOCK DROP LENGTHS

Item #	Length (ft/in)*	Length (m)	Qty
51-X0200-02	2 ft**	0.61 m	
51-X0300-02	3 ft (Standard)	0.91 m	
51-X0400-02	4 ft	1.22 m	
51-X0500-02	5 ft	1.52 m	
51-X0600-02	6 ft	1.83 m	
51-X0700-02	7 ft	2.13 m	
51-X0800-02	8 ft	2.44 m	
51-X0900-02	9 ft	2.74 m	
51-X1000-02	10 ft	3.05 m	
51-Fftin-02	Customization fee		

* Lengths are +/- 1" depending on power unit selection/fan diameter.

X= substitute D for drops with UMH mount, F for drops with Rapid Mount Industrial (i.e. 51-F0500-02 describes a 5' drop for use with a Rapid Mount Industrial).

ft = length in feet (i.e. 04 for 4 feet, 10 for 10 feet)

in = length in inches (i.e. 05 for 5 inches, 10 for 10 inches)

**2 ft is the shortest allowed drop length for AVD5. Lengths shorter than the standard drop length are not recommended and will not work for some fan diameters. Consult MacroAir for more details.

DROP LENGTH is the distance from fan mounting point to the blades.

AVD5 fans can only be connected with a single-piece of custom length drop tube.

Measure the distance from the fan's mounting point down to the desired fan blade position and provide this information with the fan order to receive the correct custom drop length.

For custom drop lengths, order a length longer and MacroAir will cut it down to the requested length. Estimated lead time is 10 business days.

Do you have a custom color in mind? Custom powder coating is available for all our blades, mounts and drop lengths.

OPTIONAL: POWDER COATING

Item #	Diameter	Estimated Lead Time	Qty
60-80008-02	8 ft / 2.44 m	15 business days	
60-80010-02	10 ft / 3.05 m	15 business days	
60-80012-02	12 ft / 3.66 m	15 business days	
60-80014-02	14 ft / 4.27 m	15 business days	
60-80016-02	16 ft / 4.88 m	15 business days	
60-80018-02	18 ft / 5.49 m	15 business days	
60-80020-02	20 ft / 6.07 m	15 business days	
60-80024-02	24 ft / 7.32 m	15 business days	

For powder coating colors, please refer to Appendix A.



ADDITIONAL OPTIONS

Item #	Description	Qty
10-60200-00	AVD Fuse Disconnect*	

*IEC Compliance requires a fused disconnect switch. Fuse selection is input voltage specific, so fuses are not provided with purchase of a disconnect.

BASIC SPECIFICATIONS

AIRFOIL DIAMETER	8ft	10ft	12ft	14ft	16ft	18ft	20ft	24ft
Airfoil Style	7.375" Extruded Anodized Aluminum Airfoil							
Number of Airfoils	5							
PERFORMANCE								
Max Speed	200 RPM	190 RPM	130 RPM	99 RPM	78 RPM	73 RPM	70 RPM	50 RPM
Recommended Spacing*	57 ft [17.4 m]	62 ft [18.9 m]	67 ft [20.4 m]	77 ft [23.5 m]	82 ft [25.0 m]	87 ft [26.5 m]	97 ft [29.6 m]	105 ft [32.0 m]
Max Affected Area	4,950 ft² [460 m²]	6,150 ft² [571 m²]	8,100 ft² [752 m²]	10,300 ft² [957 m²]	11,875 ft² [1,103 m²]	14,200 ft² [1,319 m²]	18,475 ft² [1,716 m²]	20,350 ft² [1,891 m²]
Sound Level dBA at Max Speed**	61	59	60	56	53	53	57	56
Carrier/Switching Frequency**	16,000Hz							
HANGING REQUIREMENTS								
Hanging Weight	138.8 lbs [63.0 kg]	140.9 lbs [63.9 kg]	143.1 lbs [64.3 kg]	145.2 lbs [65.8 kg]	155.8 lbs [70.7 kg]	157.9 lbs [71.6 kg]	173.6 lbs [78.7 kg]	177.8 lbs [80.6 kg]
MOTOR AND DRIVE TRAIN								
Motor Type	Gearless Direct Drive							
Equivalent Horsepower Rating	1.0 HP (8ft - 24ft)							
Operating Temp Range	16°F [-10C°] - 140 F° [60C°]							
MAX AMP DRAW								
208-240V Single Phase	3.8	6.5	5.1	4.4	3.7	4.5	5.4	4.3
208-240V Three Phase	2.2	3.8	2.9	2.5	2.1	2.6	3.1	2.5
480V Three Phase	1.6	2.7	2.1	1.8	1.5	1.8	2.2	1.8
POWER AND CONTROLS								
Power Source	Single Phase or Three Phase 208-240 VAC +/-5%, 50/60 Hz, Three Phase 480 VAC +/-5%, 50/60 Hz							
Control Options	Digital Touchpad, MacroAir Controller 4, Controller 30, AirLynk - BacNet							
INSTALLATION								
Mounting Hardware	Universal Mount, Rapid Mount Industrial							
Drop Length	In addition to the standard drop length supplied, optional drop lengths are available in 1ft increments; all drop lengths require guy wires except when used with the Rapid Mount Industrial							
RATINGS AND COMPLIANCE								
Fire and Sprinkler	NFPA Compliant							
Outdoor Rating***	Rated for outdoor use							
Certifications	Pending							

*For spacing between fan units based on the dimensions of a specific space please refer to <https://macroairfans.com/airviz>.

**Sound testing taken with the sensor 5 ft above the ground and 20 ft from the center of the fan at 20 ft high. Carrier frequency will be audible to some listeners and is considered normal during operation. Supplemental information on Carrier Frequency and Decibel levels are supplied with the full product selection guide.

***Applicable to the fan unit only, does not include controller, control panel and accessories.